

FEATURES

- Four 5" low frequency drivers
- One 10" passive radiator
- Extended bass response down to 39 Hz
- Compact, low-profile design
- IP55 + Salt Water Resistant

APPLICATIONS

- Restaurants
- Lounges
- Residential Systems
- Hospitality



DESCRIPTION

FSUB45 is an ultra compact, slim and powerful lightweight subwoofer. It is equipped with four 5" low frequency drivers and a single 10" passive radiator. This configuration allows the FSUB45 to provide potent bass reinforcement, with a maximum SPL of 123 dB. while maintaining an extremely compact footprint and very clean look.

The Floor Sub is only 7.4" (188 mm) high, equipped with low-profile rubber feet for floor deployment and it is entirely free of visible branding, to help it blend in to any decor. FSUB45 can be paired with any of the loudspeakers in the Cannon Series to form a powerful and discreet installed audio system.

SPECIFICATIONS

Audio Specifications

- Description:** Passive, compact, narrow-profile installation subwoofer
- Bandwidth:** 39 Hz - 140 Hz (-6 dB preset dependent)
- Max SPL:** 123 dB SPL @ 1 m with preset
- Power:** 900 watts (continuous), 450 watts (AES)
- Directivity:** Omnidirectional
- Elements:** (4) 5" low frequency drivers, (1) 10" passive radiator
- Impedance:** 8 Ω
- Connectors:** (1) NL4


Mechanical Specifications

- IP Rating:** IP55 indoor/outdoor and salt water resistant
- Rigging:** Floor supported: no rigging, no holes, no branding
- Weight:** 25.1 lbs / 11.4 kg
- Construction:** Finland birch ply (phenolic glue), clear matte salt and UV resistant coating, 316 stainless steel hardware, 3D spacer mesh fabric
- Dimensions:** 11.7" (298 mm) x 7.4" (188 mm) x 23.5" (596 mm)
- Colors:** Stocking black and white, custom colors and fabrics available
- Accessories:** A floor to place it on


DIRECTIVITY

Horizontal Polar Plot


Sound Pressure Level (dB)

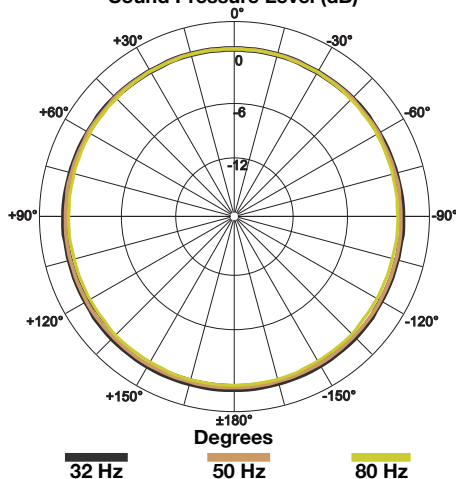


Horizontal Coverage

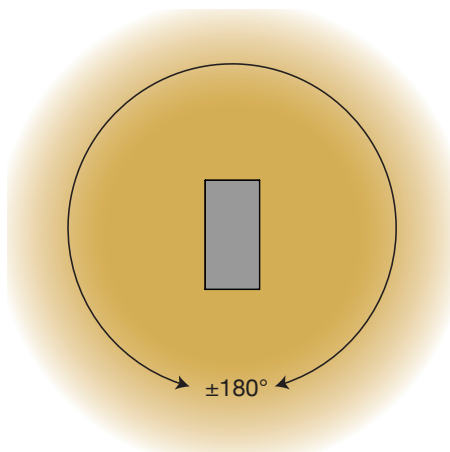


Vertical Coverage

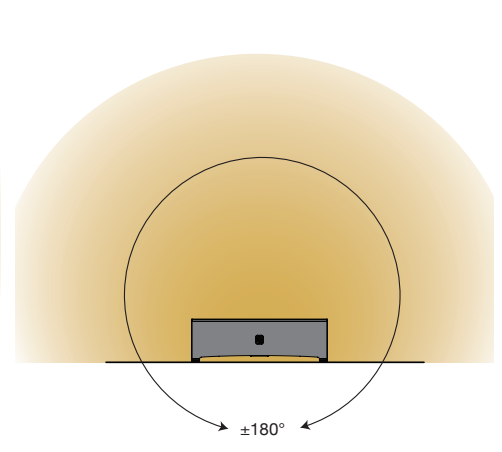


FREQUENCY RESPONSE

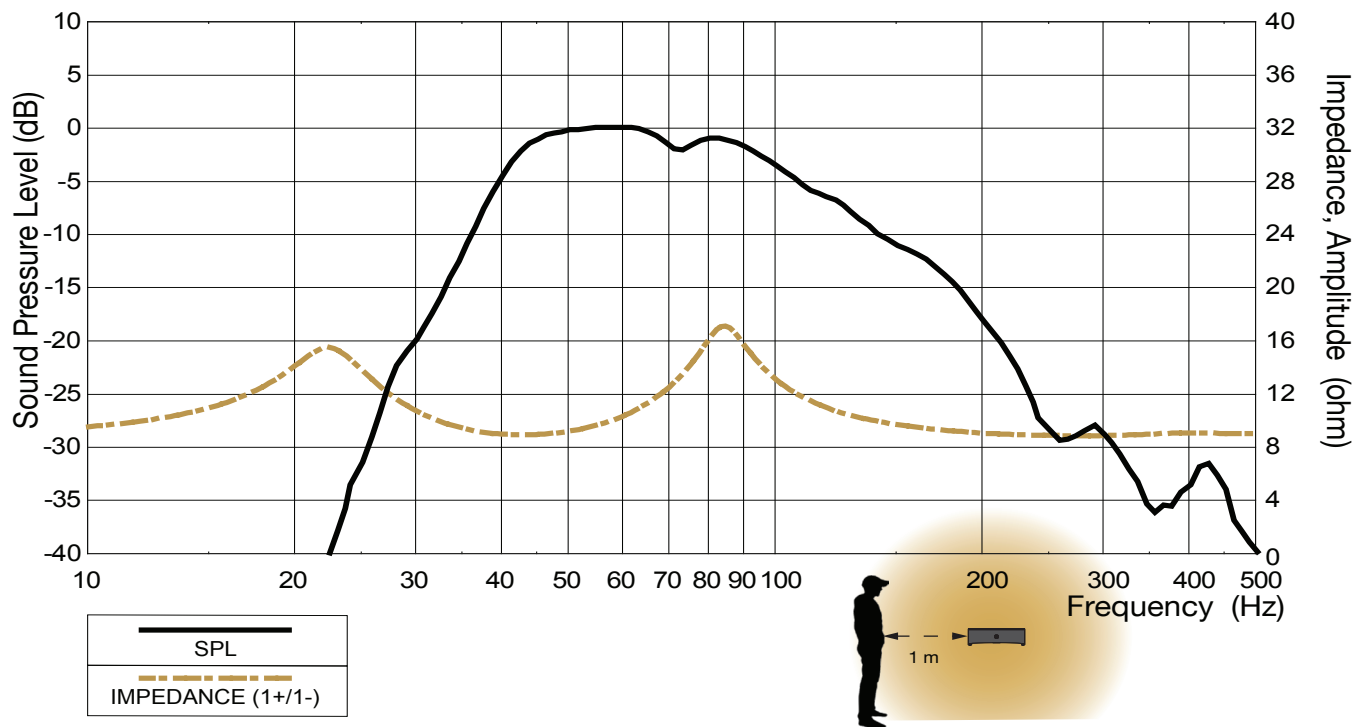

WIRING

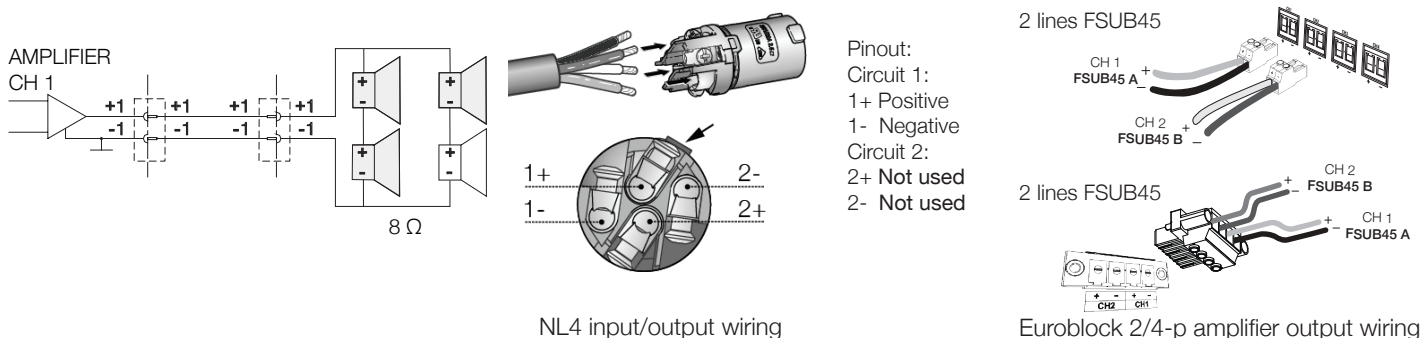

DIMENSIONS

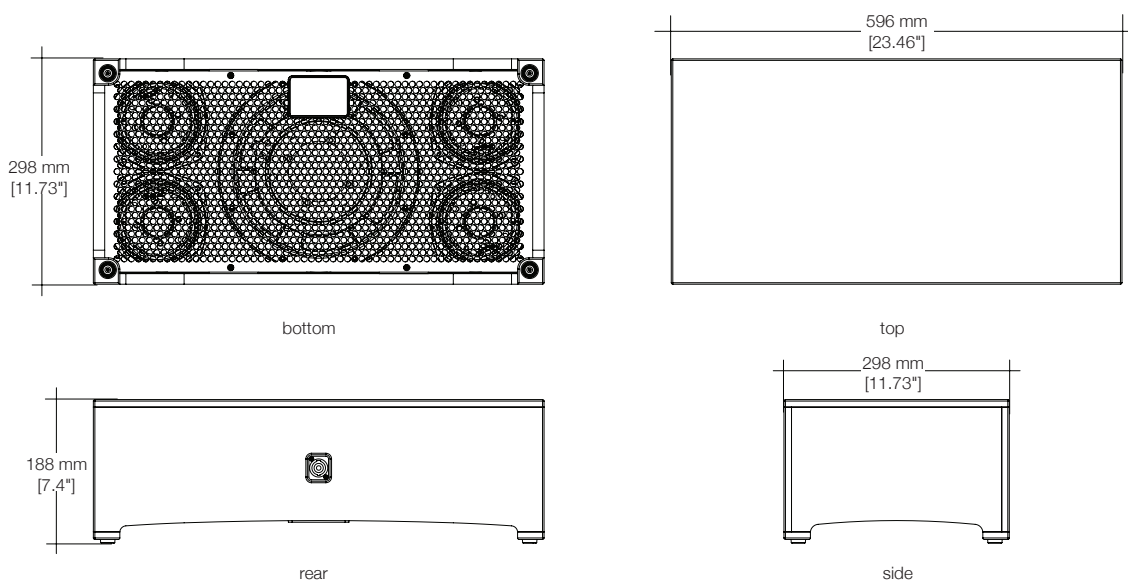

Contact

For more product or service information please contact the 1 SOUND headquarters.

1 SOUND, Manufacturer
USA Distributor
34 Apple Street
Tinton Falls, NJ 07724

tel. +1-732-798-9900
sales@1-sound.com

Warranty

All manufactured 1 SOUND products are warranted to be free from defects in materials or workmanship for a period of 3 years from original purchase. If there is specific hardware or grilles you might want replaced or any repairs needed please contact your region's authorized 1 SOUND distributor.

